

EL100AF

MOTOR OPERATED EXTERNAL VENETIAN BLIND 100 MM SLATS WITH SIDE GUIDING CABLES



EL100AF: flexible 100 mm slats

Description

- Roll formed zinc-plated steel U-shaped head rail 57 x 51 mm
- Thermally protected 230 V motor, dust and splash waterproof according to IP54
- Positive tilting mechanism to prevent slat movement by wind
- Lowering with slats closed, raising with slats 25° open
- Roll formed coil coated 100 mm slats of partly recycled aluminium
- Natural anodised or powder coated extruded aluminium bottom rail 100 x 20 mm
- Tensioned stainless steel cable Ø 3 mm with transparent Nylon jacket
- Black bottom rail end caps, lift tape and Aramid reinforced polyester ladder cords
- UV and weather resistant components of mixed composition
- Wind stable as further determined by size and controls

100F

Actual size

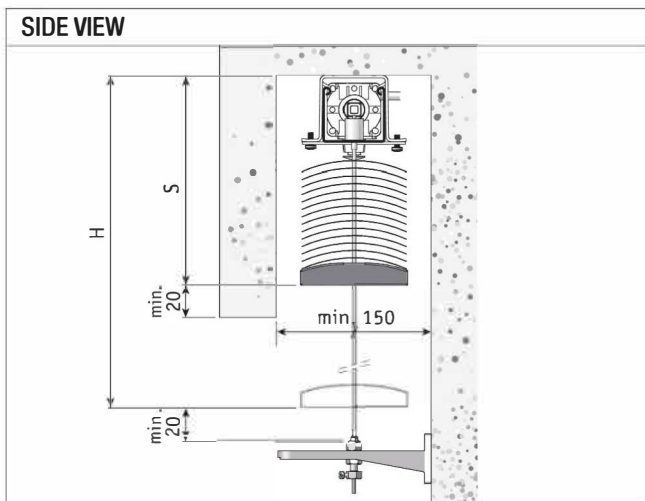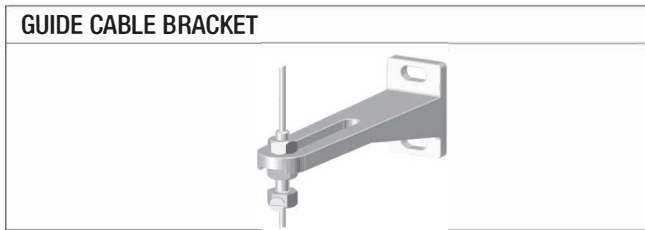

		Width		Height max. (cm)	Surface max. (m ²)
		min. (cm)	max. (cm)		
Single	EL 100 AF	56	440	400	16
Group	EL 100 AF		1000	400	20

STACKING HEIGHT (MM) (intermediate blind heights on page 85)			
Blind height H	Stacking height EL100AF	Blind height H	Stacking height EL100AF
1000	130	3000	170
1500	140	3500	180
2000	150	4000	190
2500	160		

OPTIONS EL100AF


GUIDE CABLE BRACKETS

3 sizes (X, mm);

60 - 105

67 - 133

124 - 173

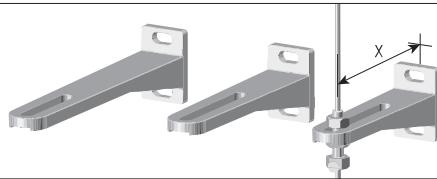


GUIDE CABLE BRACKETS, IDEFIX




HEAVY DUTY CABLE BRACKETS

Shapes and sizes according to customer specifications
(X=max.500)

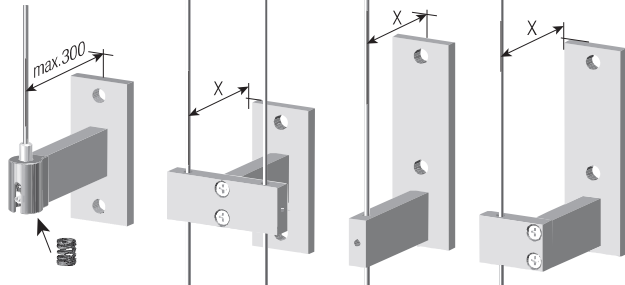

PELMET

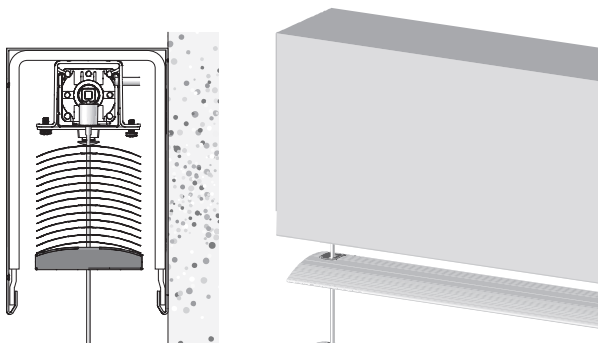


40° TIMER


Standard;
lowering with closed slats




40° Timer;
lowering with slats 40° open



HEAD RAIL

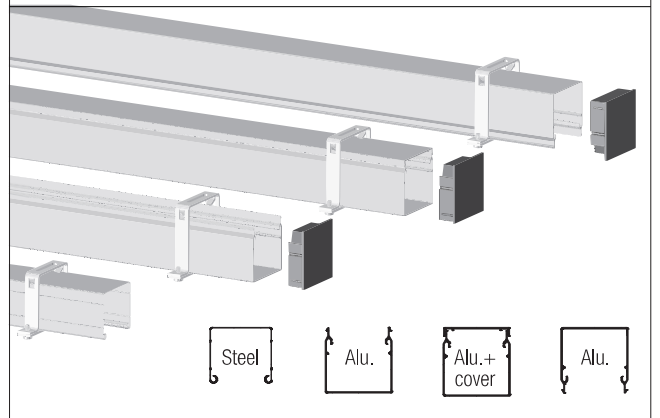

COUPLING

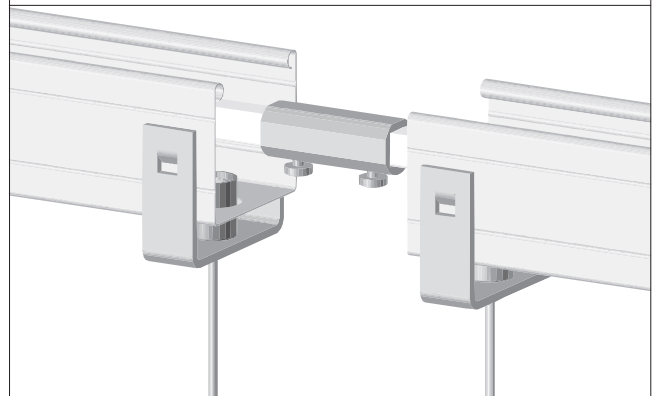

FURTHER OPTIONS (Additional information on page 81)

- Dual Light Control
- Slow motion motor for more precise slat tilting
- Perforated slats
- Additional guiding cable(s)
- For possible motor controls see separately available documentation