




# EL50AF

## MOTOR OPERATED EXTERNAL VENETIAN BLIND 50 MM SLATS WITH SIDE GUIDING CABLES

EL50AF: flexible 50 mm slats

### Description

- Roll formed zinc-plated steel U-shaped head rail 57 x 51 mm
- Thermally protected 230 V motor, dust and splash waterproof according to IP54
- Positive tilting mechanism to prevent slat movement by wind
- Lowering with slats closed, raising with slats closed
- Roll formed coil coated flexible slats 50 mm of partly recycled aluminium
- Natural anodised or powder coated extruded aluminium bottom rail 50 x 15 mm
- Tensioned stainless steel cable  $\varnothing$  3 mm with transparent nylon jacket
- Black bottom rail end caps, lift tape and polyester ladder cords
- UV and weather resistant components of mixed composition
- Wind stable as further determined by size and controls

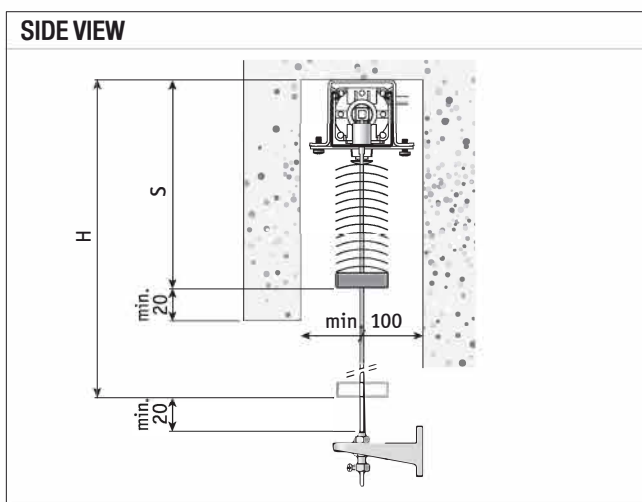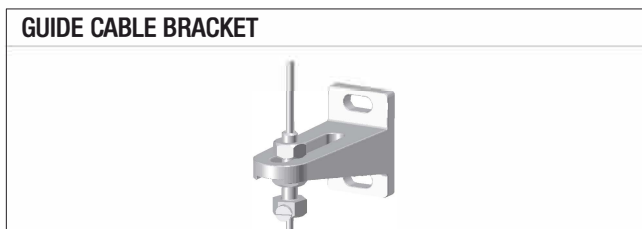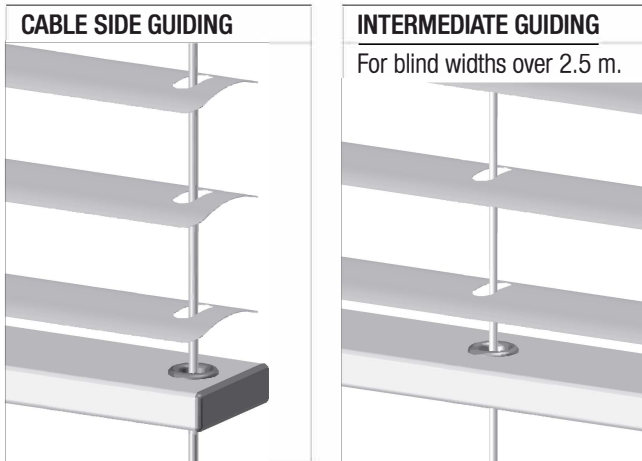


		Width		Height max. (cm)	Surface max. (m <sup>2</sup> )
		min. (cm)	max. (cm)		
Single	EL 50 AF	51	400	400	16
Group	EL 50 AF		800	400	20

STACKING HEIGHT (MM) (intermediate blind heights on page 85)			
Blind height H	Stacking height S	Blind height H	Stacking height S
1000	127	3000	177
1500	140	3500	192
2000	152	4000	207
2500	165		

# OPTIONS EL50AF

## GUIDE CABLE BRACKETS

4 sizes (X, mm);  
27 - 73  
60 - 105  
67 - 133  
124 - 173

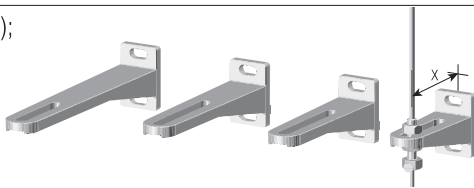


## GUIDE CABLE BRACKETS, IDEFIX





## HEAVY DUTY CABLE BRACKETS


Shapes and sizes according to customer specifications  
(X=max.500)

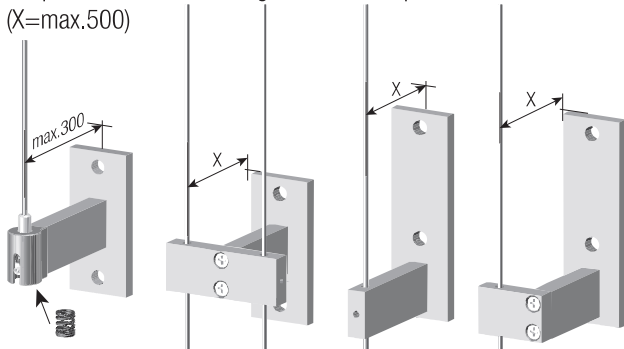


## PELMET

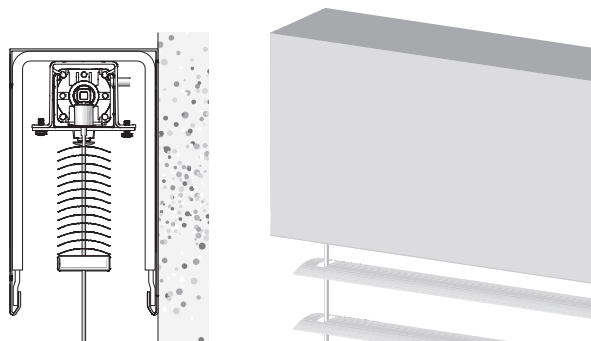

## HEAD RAIL

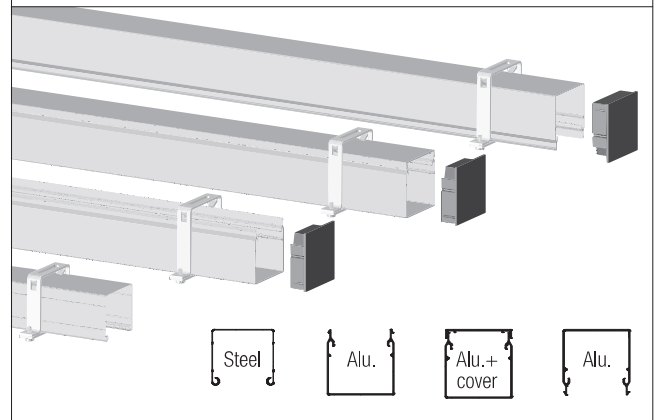

## COUPLING

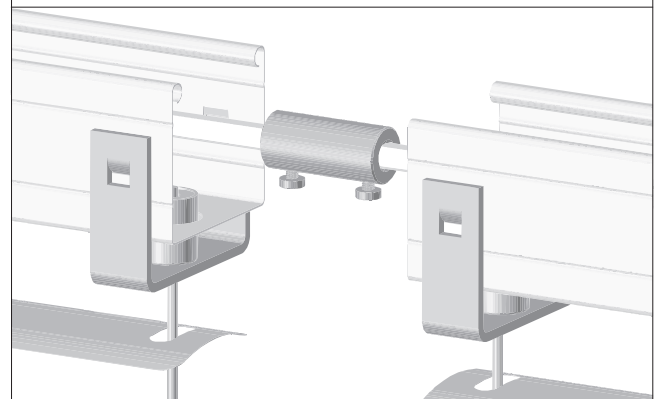

## FURTHER OPTIONS (Additional information on page 81)

- Slow motion motor for more precise slat tilting
- Lift tape and ladder cords in grey
- Perforated slats
- Additional guiding cable(s)
- For possible motor controls see separately available documentation