

# EL60AS, EL60ASF







## MOTOR OPERATED EXTERNAL VENETIAN BLIND 60 MM SLATS WITH STANDARD SIDE GUIDING CHANNELS

EL60AS : beaded 60 mm slats

EL60ASF : flexible 60 mm slats

### Description

- Roll formed zinc-plated steel U-shaped head rail 57 x 51 mm
- Thermally protected 230 V motor, dust and splash waterproof according to IP54
- Positive tilting mechanism to prevent slat movement by wind
- Lowering with slats closed, raising with slats 45° open
- Roll formed coil coated 60 mm slats of partly recycled aluminium
- Natural anodised or powder coated extruded aluminium bottom rail 60 x 19 mm
- Extruded side guiding channels 27 x 24 mm with groove in similar finish and black insert for noise reduction
- Black bottom rail end caps, lift tape and Aramid reinforced polyester ladder cords
- UV and weather resistant components of mixed composition
- Wind stable as further determined by size and controls

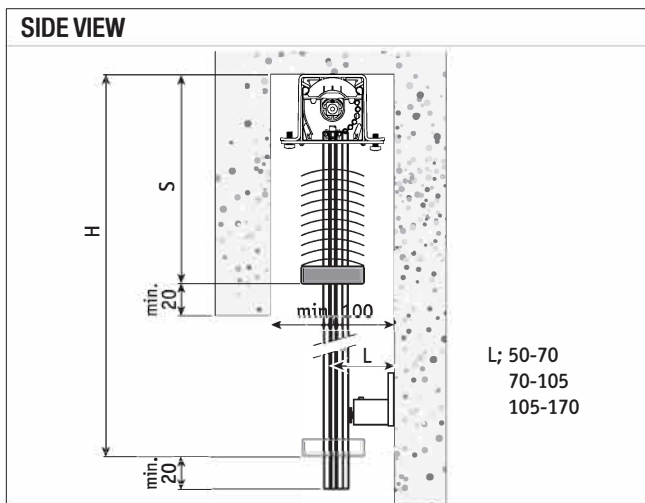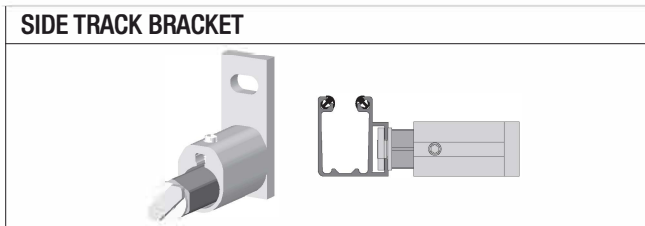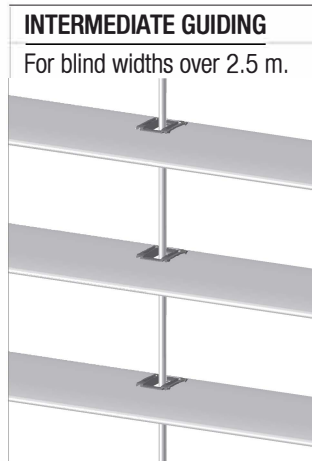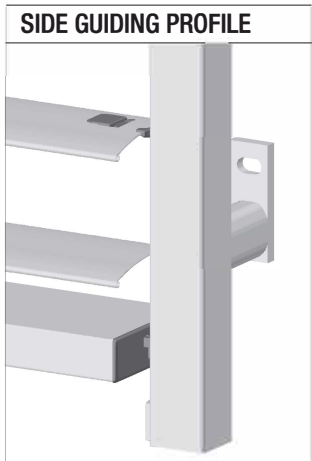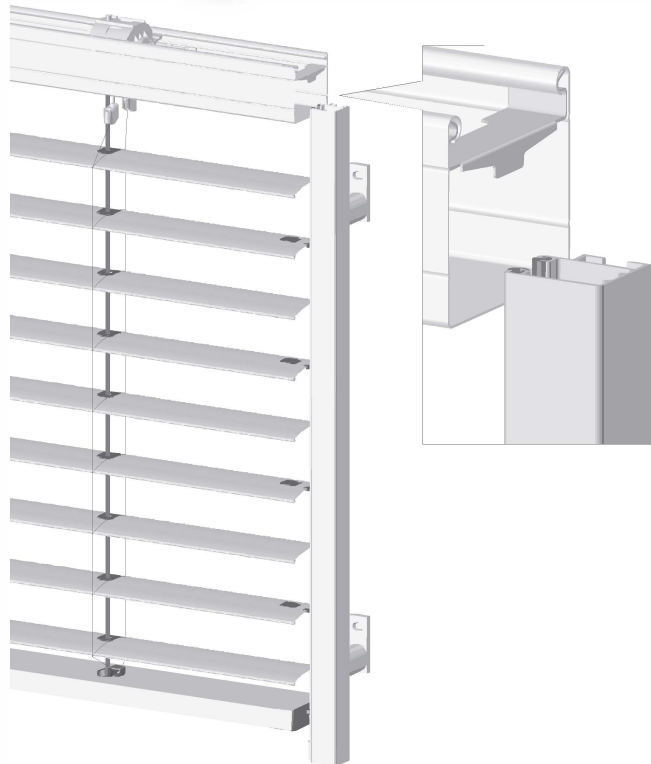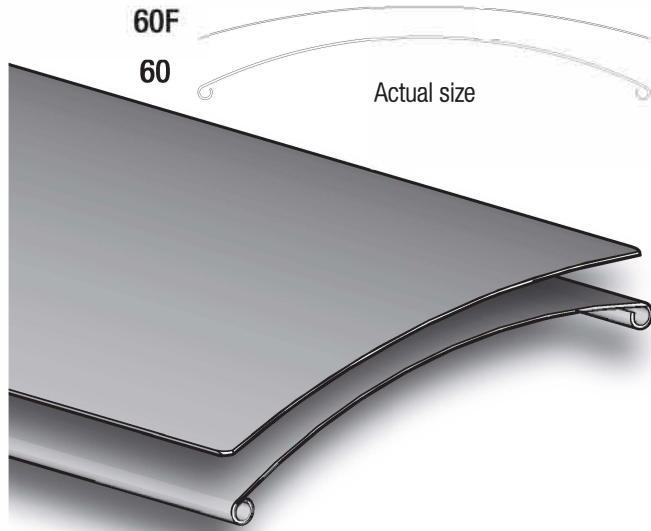

		Width		Height max. (cm)	Surface max. (m <sup>2</sup> )
		min. (cm)	max. (cm)		
Single	EL 60 AS	58	500	400	16
	EL 60 ASF	58	300	400	12
Group	EL 60 AS		1000	400	20
	EL 60 ASF		1000	400	20

STACKING HEIGHT (MM) (intermediate blind heights on page 85)					
Blind height H	Stacking height S		Blind height H	Stacking height S	
	60AS	60ASF		60AS	60ASF
1000	183	142	3000	340	225
1500	222	164	3500	380	242
2000	260	185	4000	420	256
2500	297	205			


# OPTIONS EL60AS, EL60ASF

## SIDE TRACK BRACKETS


50-70 mm




70-105 mm





105-170 mm



## SIDE TRACKS

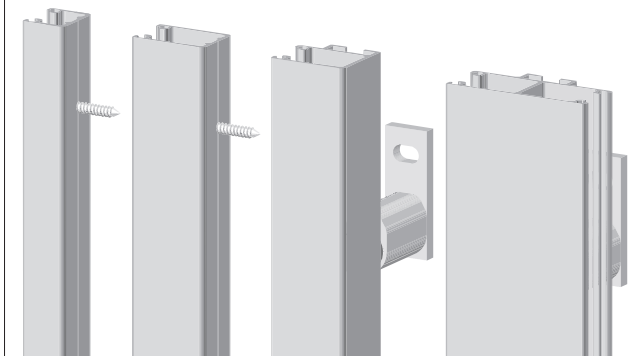

## PELMET

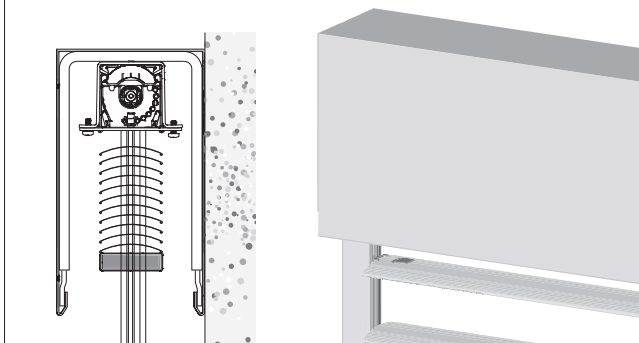


## 40° TIMER


Standard;  
lowering with closed slats



40° Timer;  
lowering with slats 40° open



## HEAD RAIL

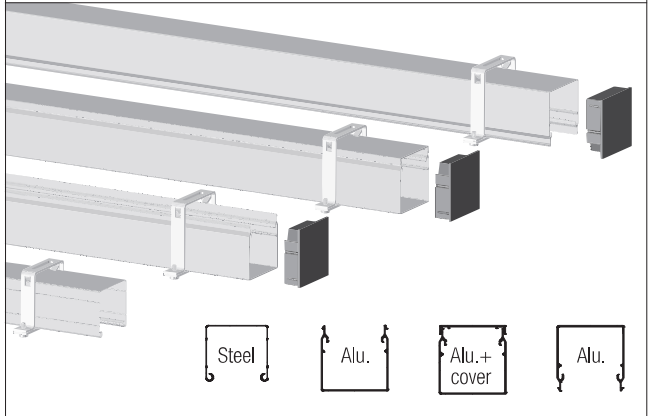


Steel

Alu.

Alu.+  
cover

Alu.

## COUPLING

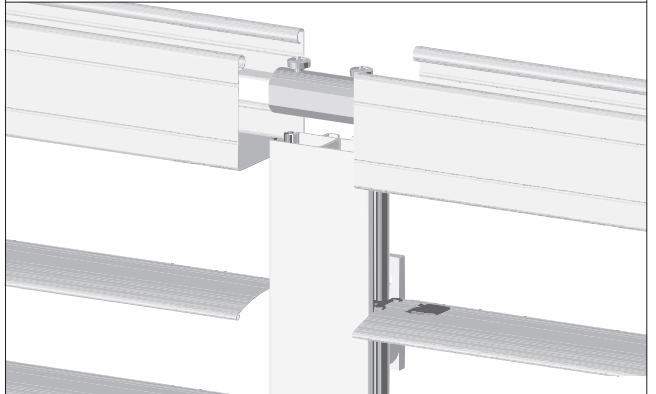

## FURTHER OPTIONS (Additional information on page 81)

- Quick raise system for emergency situations (EL60ASN)
- Dual Light Control
- Slow motion motor for more precise slat tilting
- Perforated slats
- Additional guiding cable(s)
- For possible motor controls see separately available documentation
- Lockable bottomrail, to use in case of an emergency