

# EL60ASK, EL60ASKF







## MOTOR OPERATED EXTERNAL VENETIAN BLIND 60 MM SLATS WITH CLAMP-ON SIDE GUIDING CHANNELS

EL60ASK : beaded 60 mm slats

K60ASKF : flexible 60 mm slats

### Description

- Installation on or in between side tracks
- Roll formed zinc-plated steel U-shaped head rail 57 x 51 mm
- Thermally protected 230 V motor, dust and splash waterproof according to IP54
- Positive tilting mechanism to prevent slat movement by wind
- Lowering with slats closed, raising with slats 45° open
- Roll formed coil coated 60 mm slats of partly recycled aluminium
- Natural anodised or powder coated extruded aluminium bottom rail 60 x 19 mm
- Extruded side guiding channels 18 x 37 mm with groove in similar finish with black insert for noise reduction
- Black bottom rail end caps, lift tape and Aramid reinforced polyester ladder cords
- UV and weather resistant components of mixed composition
- Wind stable as further determined by size and controls

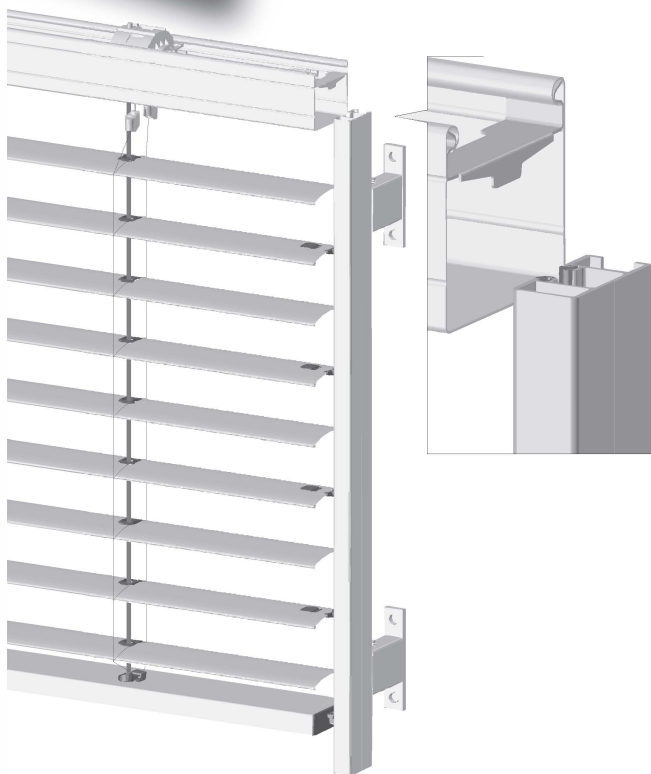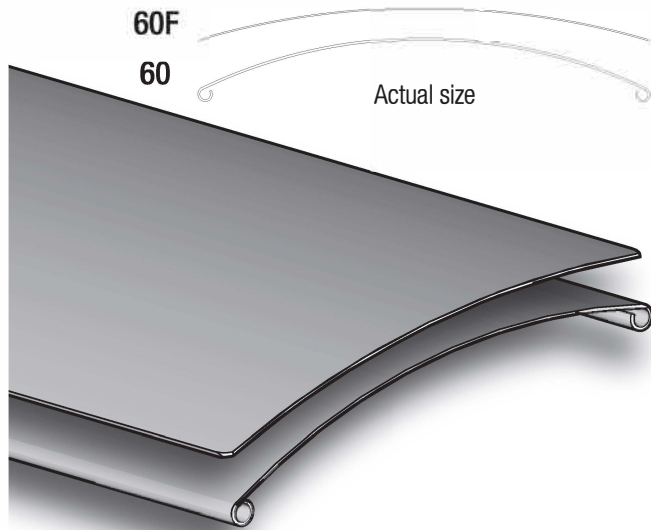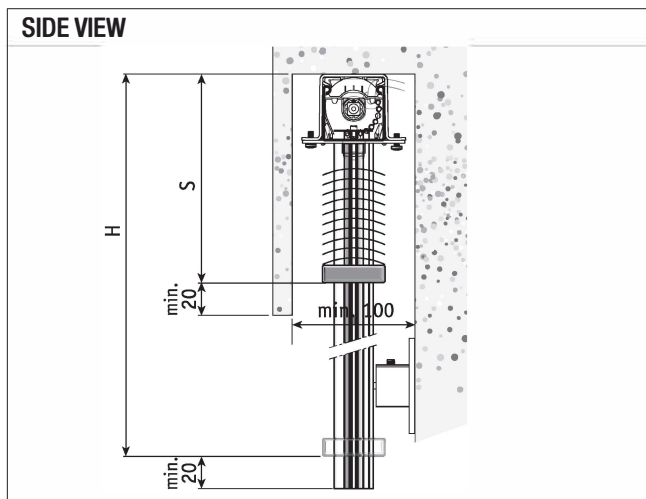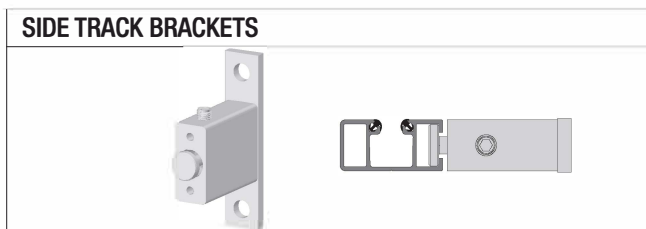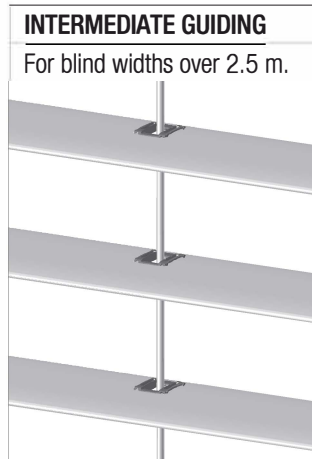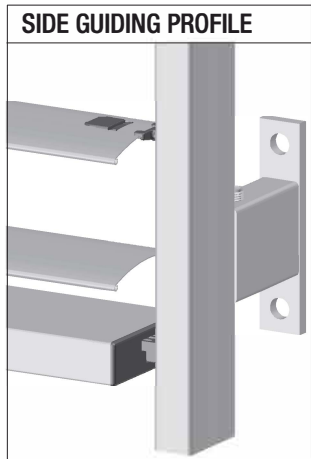


		Width		Height max. (cm)	Surface max. (m <sup>2</sup> )
		min. (cm)	max. (cm)		
Single	EL 60 ASK	56	500	400	16
	EL 60 ASKF	56	300	400	12
Group	EL 60 ASK		1000	400	20
	EL 60 ASKF		1000	400	12

### STACKING HEIGHT (MM) (intermediate blind heights on page 85 )

Blind height H	Stacking height S		Blind height H	Stacking height S	
	60ASK	60ASKF		60ASK	60ASKF
1000	183	142	3000	340	225
1500	222	164	3500	380	242
2000	260	185	4000	420	256
2500	297	205			

# OPTIONS EL60ASK, EL60ASKF

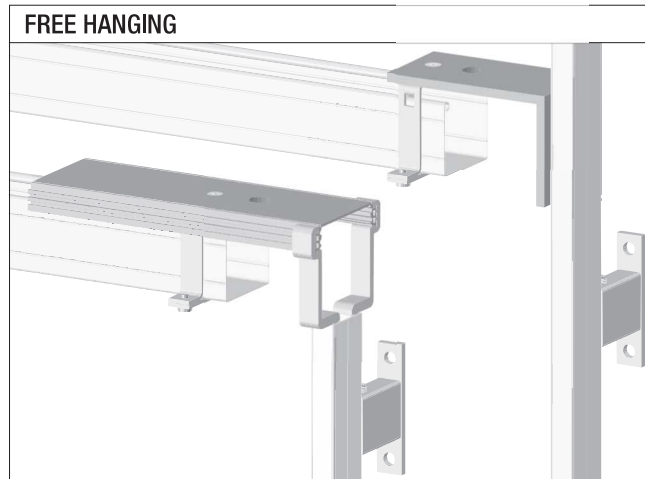

**40° TIMER**


Standard;  
lowering with closed slats

40° Timer;  
lowering with slats 40° open




**SIDE TRACK BRACKETS**


Sizes according to customer specifications.

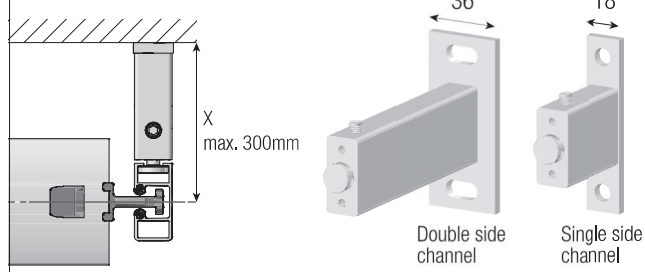


**HEAD RAIL**

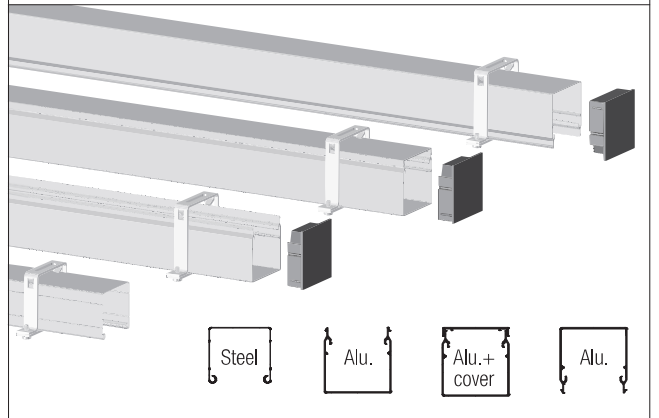


**SIDE TRACKS**

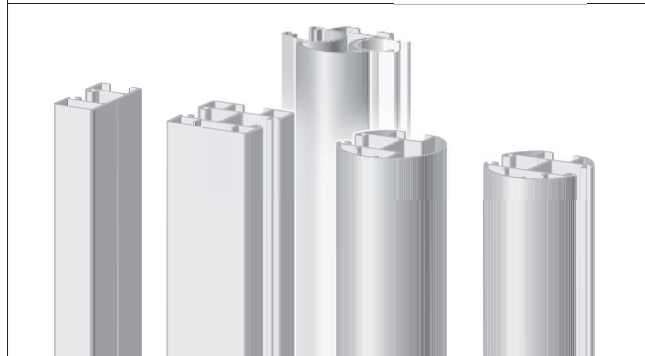

**COUPLING**

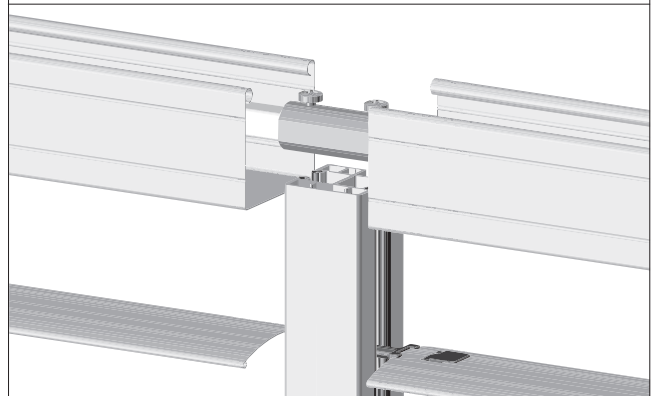

**PELMET**

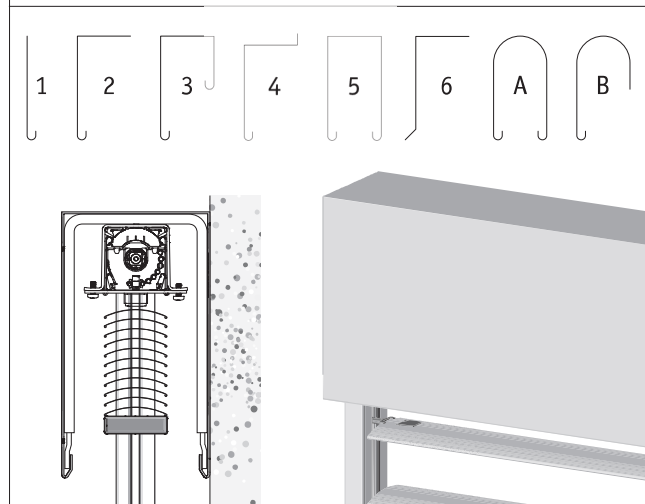

**FURTHER OPTIONS** (Additional information on page 81)

- Quick raise system for emergency situations (EL60ASKN)
- Dual Light Control
- Slow motion motor for more precise slat tilting
- Perforated slats
- Additional guiding cable(s)
- Free hanging system
- For possible motor controls see separately available documentation