

EL60ASS, EL60ASSF






MOTOR OPERATED EXTERNAL VENETIAN BLIND 60 MM SLATS WITH PUSH-ON SIDE GUIDING CHANNELS

EL60ASS : beaded 60 mm slats

EL60ASSF: flexible 60 mm slats

Description







- Roll formed zinc-plated steel U-shaped head rail 57 x 51 mm
- Thermally protected 230 V motor, dust and splash waterproof according to IP54
- Positive tilting mechanism to prevent slat movement by wind
- Lowering with slats closed, raising with slats 45° open
- Roll formed coil coated 60 mm slats of partly recycled aluminium
- Natural anodised or powder coated extruded aluminium bottom rail 60 x 19 mm
- Extruded side guiding channels 18 x 37 mm with groove in similar finish with black insert for noise reduction
- Black bottom rail end caps, lift tape and Aramid reinforced polyester ladder cords
- UV and weather resistant components of mixed composition
- Wind stable as further determined by size and controls

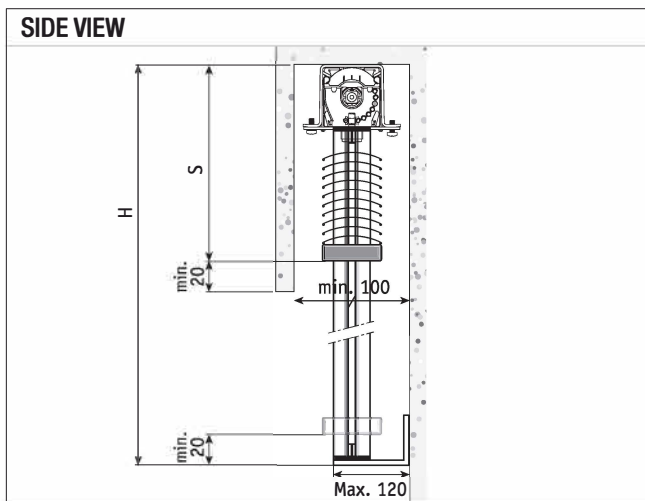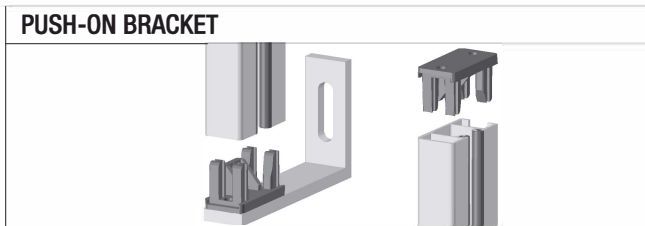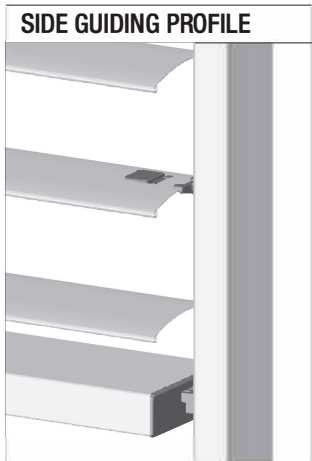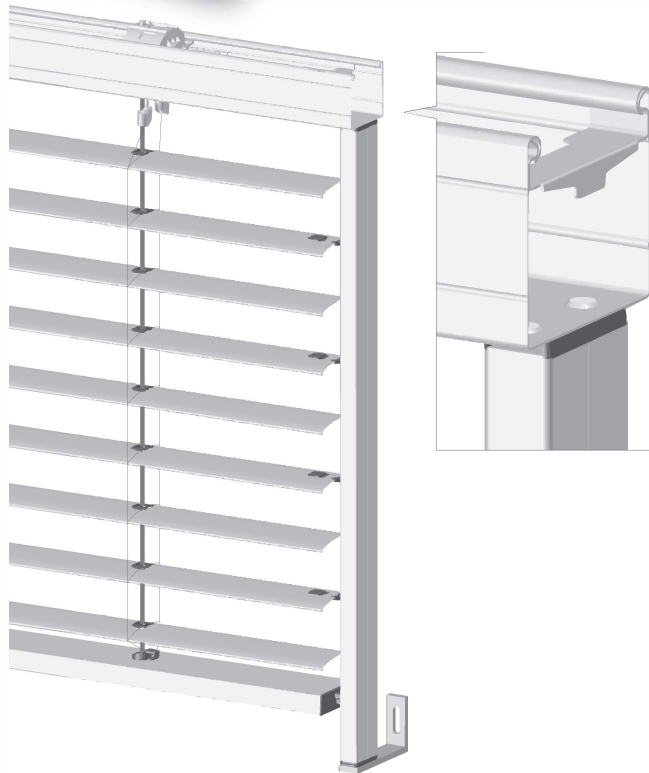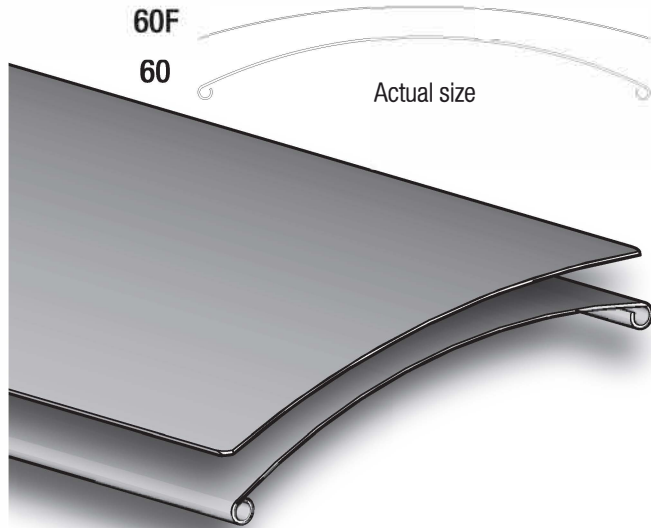

SIZE LIMITATIONS					
		Width		Height	Surface
		min. (cm)	max. (cm)	max. (cm)	max. (m ²)
Single	EL 60 ASS	56	300	250	7
	EL 60 ASSF	56	300	250	7
Group	EL 60 ASS		1000	250	20
	EL 60 ASSF		1000	250	20

STACKING HEIGHT (MM) (intermediate blind heights on page 85)					
Blind height H	Stacking height S 60ASS	Stacking height S 60ASSF	Blind height H	Stacking height S 60ASS	Stacking height S 60ASSF
1000	183	142	2000	260	185
1500	222	164	2500	297	205

OPTIONS EL60ASS, EL60ASSF

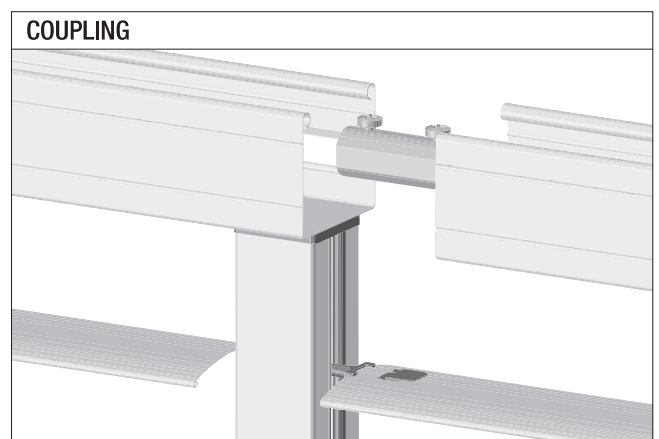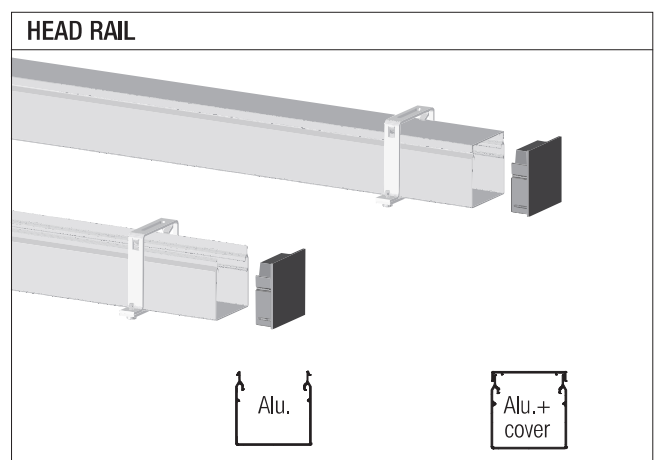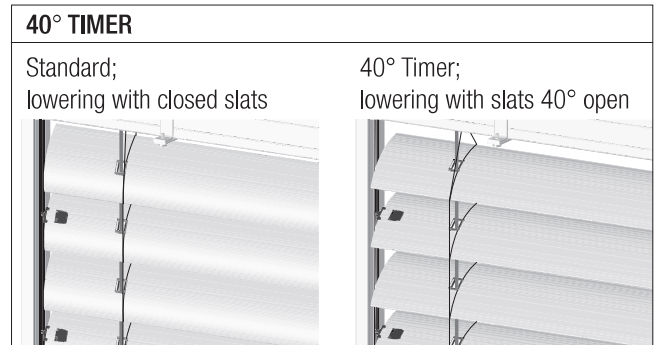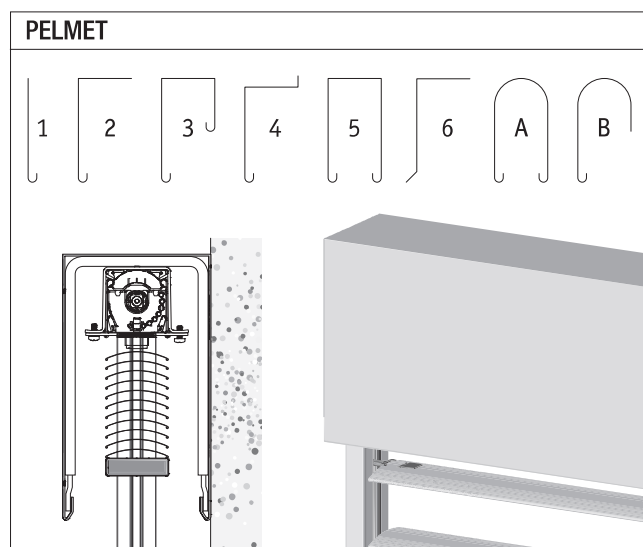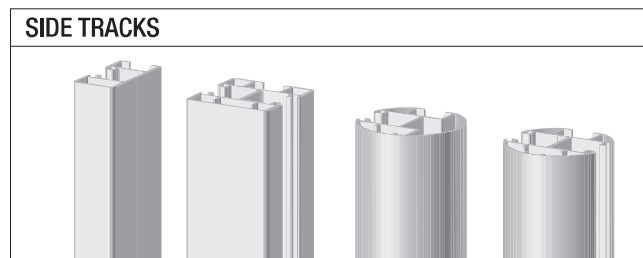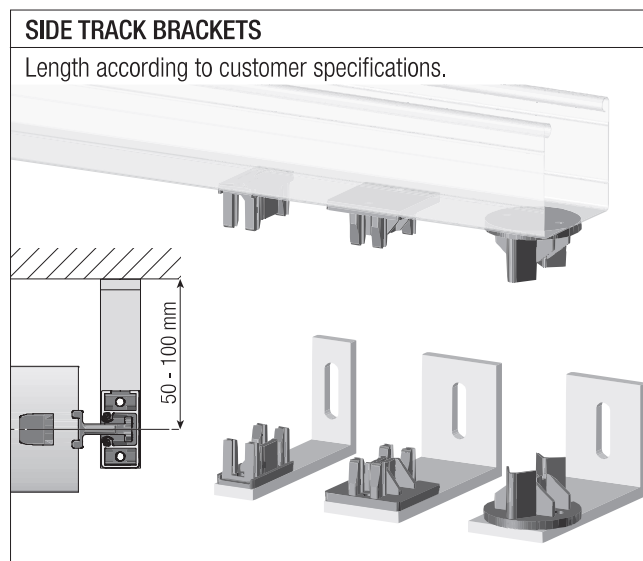

- FURTHER OPTIONS** (Additional information on page 81)
- Dual Light Control
 - Slow motion motor for more precise slat tilting
 - Perforated slats
 - Additional guiding cable(s)
 - For possible motor controls see separately available documentation