

EL80ASC, EL80ASCF 80mmF





MOTOR OPERATED EXTERNAL VENETIAN BLIND “CLICK” 80 MM SLATS WITH CLIP-ON SIDE GUIDING CHANNELS

EL80ASC : beaded 80 mm slats

EL80ASCF : flexible 80 mm slats

Description


- Easy to mount “CLICK” blind pre-installed in customised 80mm natural anodised or powder coated aluminium pelmet
- Roll formed zinc-plated steel U-shaped head rail 57 x 51 mm
- Thermally protected 230 V motor, dust and splash waterproof according to IP54
- Positive tilting mechanism to prevent slat movement by wind
- Lowering with slats closed, raising with slats 45° open
- Roll formed coil coated 80 mm slats of partly recycled aluminium
- Natural anodised or powder coated extruded aluminium bottom rail 80 x 22 mm
- Extruded side guiding channels 81 x 25 mm with groove in similar finish and black insert for noise reduction
- Black bottom rail end caps, lift tape and Aramid reinforced polyester ladder cords
- UV and weather resistant components of mixed composition
- Wind stable as further determined by size and controls

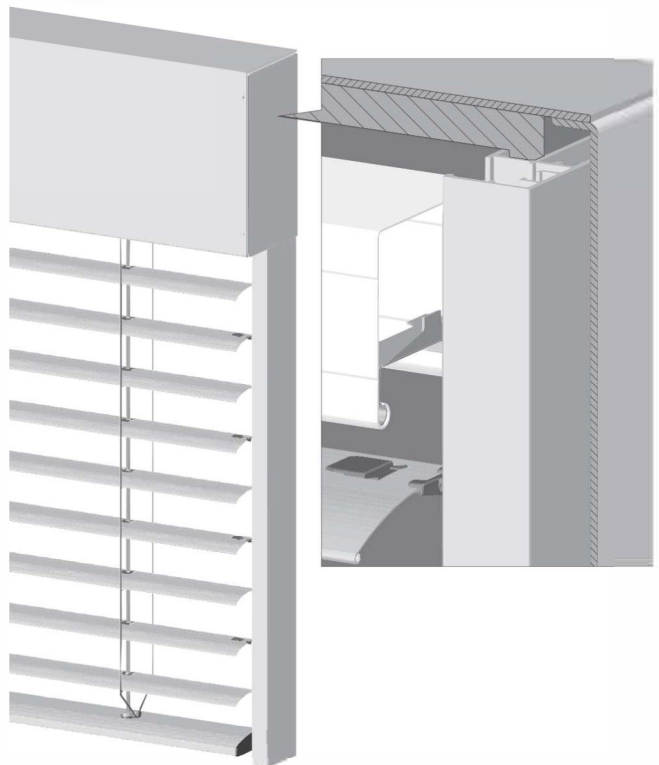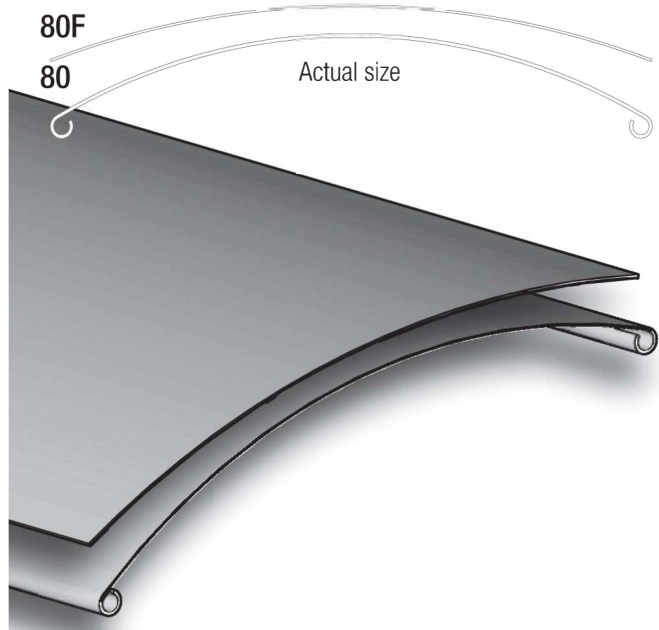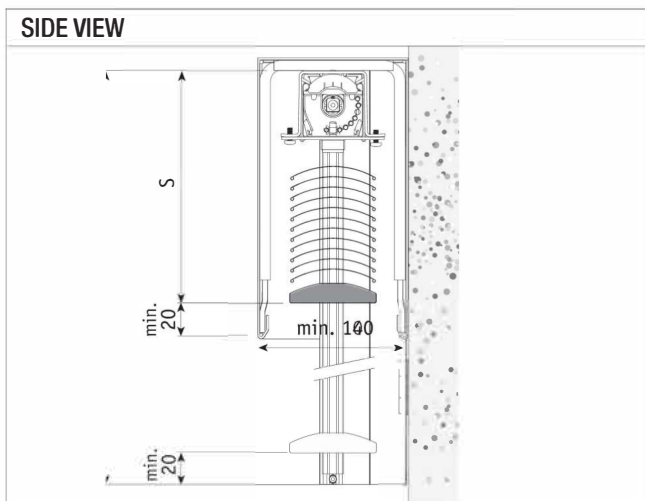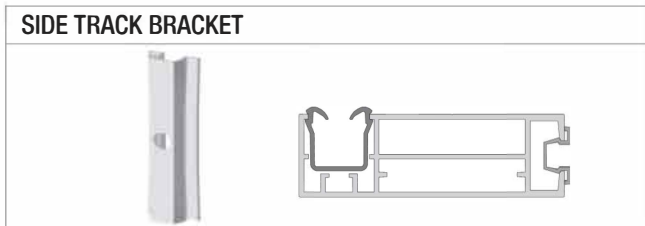

	Width		Height max. (cm)	Surface max. (m ²)
	min. (cm)	max. (cm)		
EL 80 ASC	78	350	400	12
EL 80 ASCF	78	350	400	12

STACKING HEIGHT (MM) (intermediate blind heights on page 85)									
Blind height	Stacking height 80A		Stacking height 80AF		Blind height	Stacking height 80A		Stacking height 80AF	
	Stacking height 80A	Stacking height 80AF	Stacking height 80A	Stacking height 80AF		Stacking height 80A	Stacking height 80AF		
1000	183	143	2500	273	195	4000	364	232	
1500	212	165	3000	304	207				
2000	244	182	3500	334	220				

OPTIONS EL80ASC, EL80ASCF

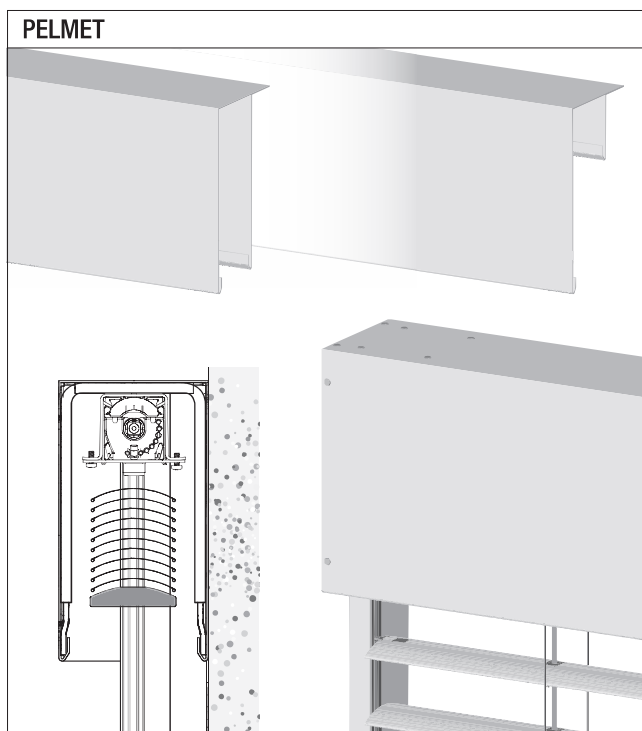


40° TIMER

Standard;
lowering with closed slats



40° Timer;
lowering with slats 40° open



FURTHER OPTIONS (Additional information on page 81)

- Dual Light Control
- Slow motion motor for more precise slat tilting
- Perforated slats
- Additional guiding cable(s)
- For possible motor controls see separately available documentation