




EL80ASK, EL80ASKF

MOTOR OPERATED EXTERNAL VENETIAN BLIND 80 MM SLATS WITH CLAMP-ON SIDE GUIDING CHANNELS

EL80ASK : beaded 80 mm slats
EL80ASKF : flexible 80 mm slats

Description

- Installation on or in between side tracks
- Roll formed zinc-plated steel U-shaped head rail 57 x 51 mm
- Thermally protected 230 V motor, dust and splash waterproof according to IP54
- Positive tilting mechanism to prevent slat movement by wind
- Lowering with slats closed, raising with slats 45° open
- Roll formed coil coated 80 mm slats of partly recycled aluminium
- Natural anodised or powder coated extruded aluminium bottom rail 80 x 22 mm
- Extruded side guiding channels 18 x 37 mm with groove in similar finish with black insert for noise reduction
- Black bottom rail end caps, lift tape and Aramid reinforced polyester ladder cords
- UV and weather resistant components of mixed composition
- Wind stable as further determined by size and controls

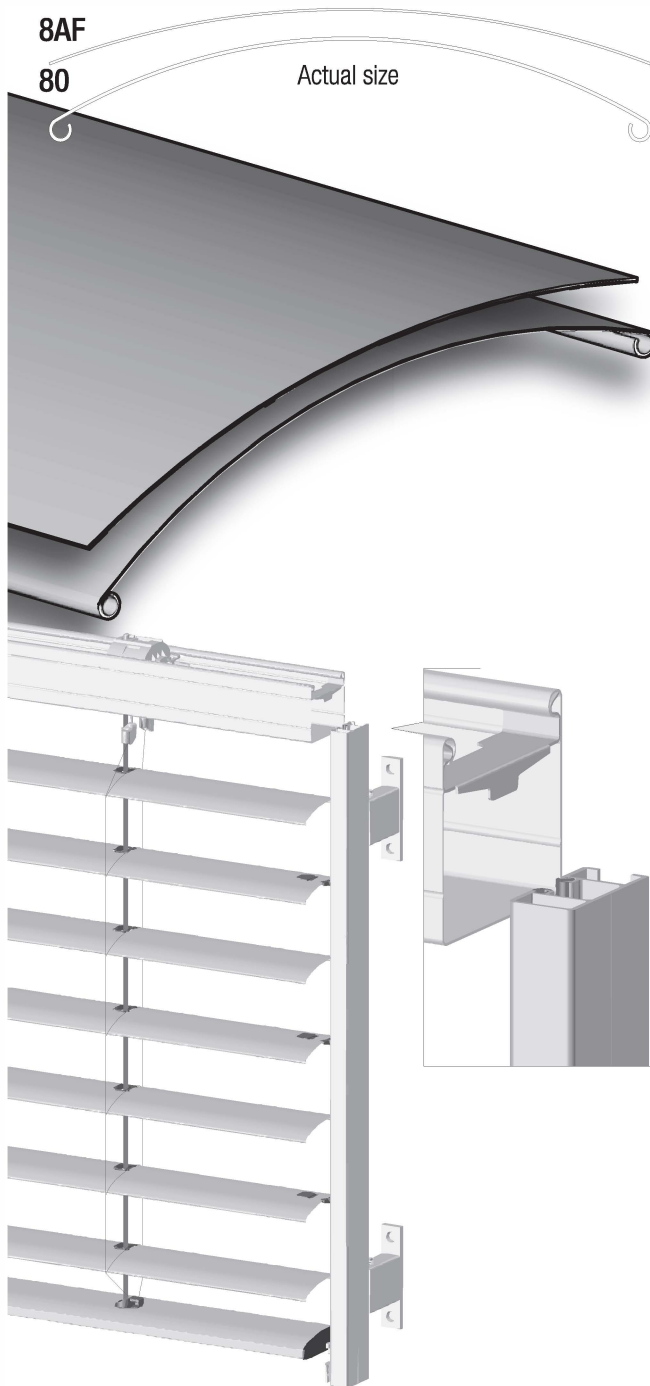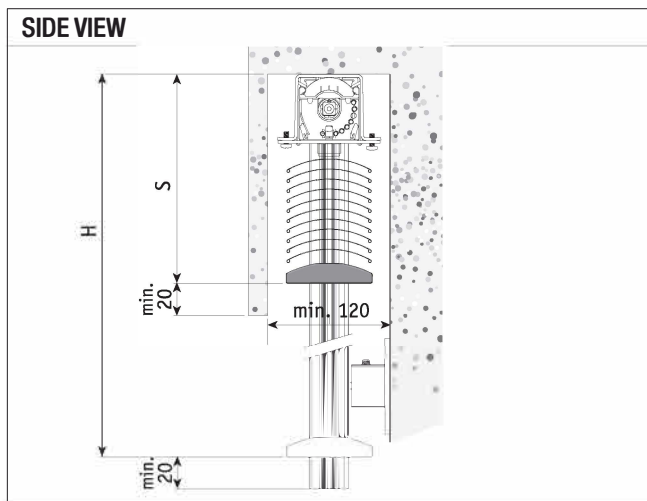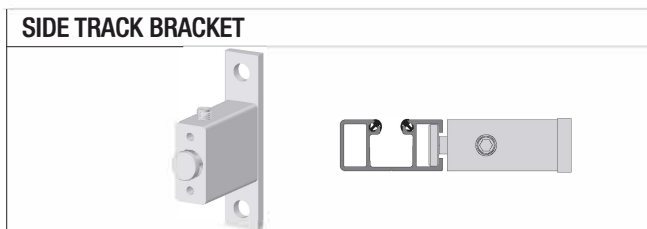


		Width		Height	Surface
		min. (cm)	max. (cm)	max. (cm)	max. (m ²)
Single	EL 80 ASK	56	500	400	16
	EL 80 ASKF	56	300	400	12
Group	EL 80 ASK		1000	400	20
	EL 80 ASKF		1000	400	20

STACKING HEIGHT (MM) (intermediate blind heights on page 85)								
Blind height	Stacking height 80ASK	Stacking height 80ASKF	Blind height	Stacking height 80ASK	Stacking height 80ASKF	Blind height	Stacking height 80ASK	Stacking height 80ASKF
1000	173	133	2500	173	133	4000	354	222
1500	202	155	3000	202	155			
2000	234	172	3500	234	172			

OPTIONS EL80ASK, EL80ASKF

FREE HANGING

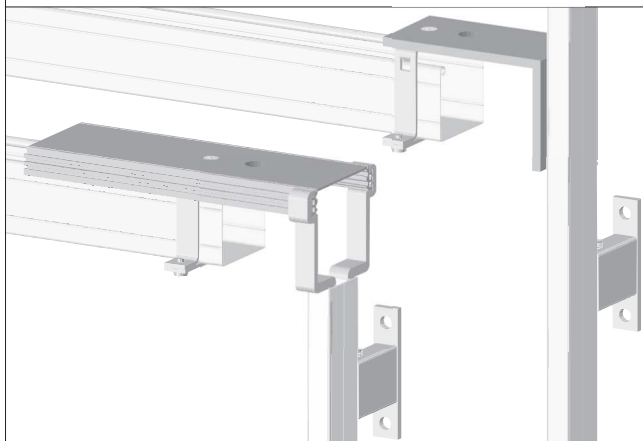

40° TIMER


Standard;
lowering with closed slats

40° Timer;
lowering with slats 40° open




SIDE TRACK BRACKETS

Sizes according to customer specifications.

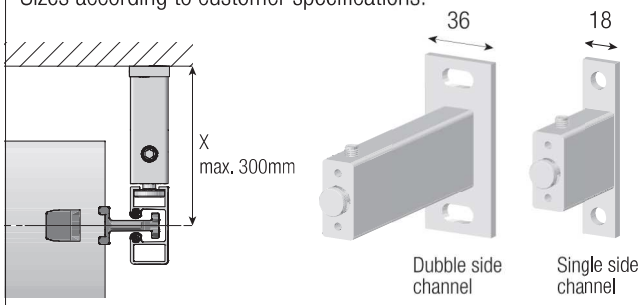


HEAD RAIL

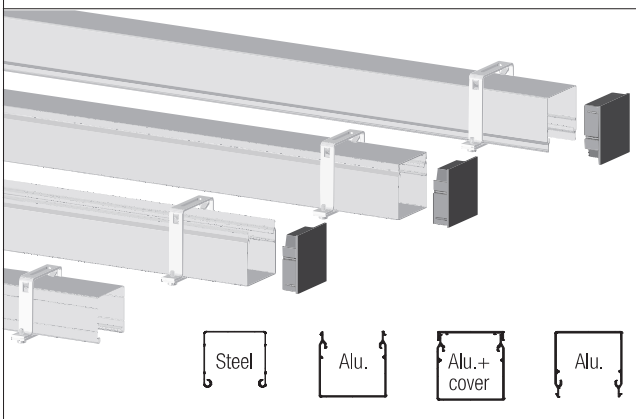


SIDE TRACKS



COUPLING

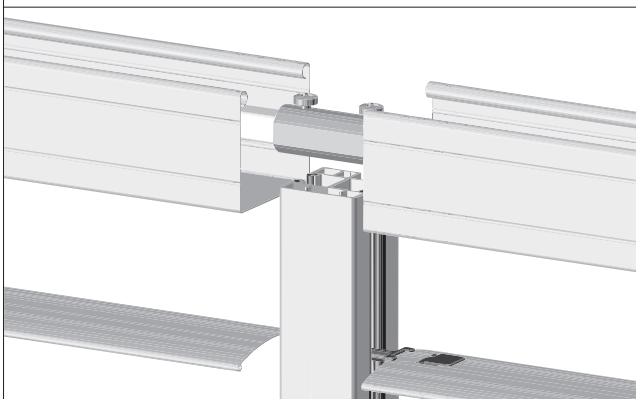

PELMET

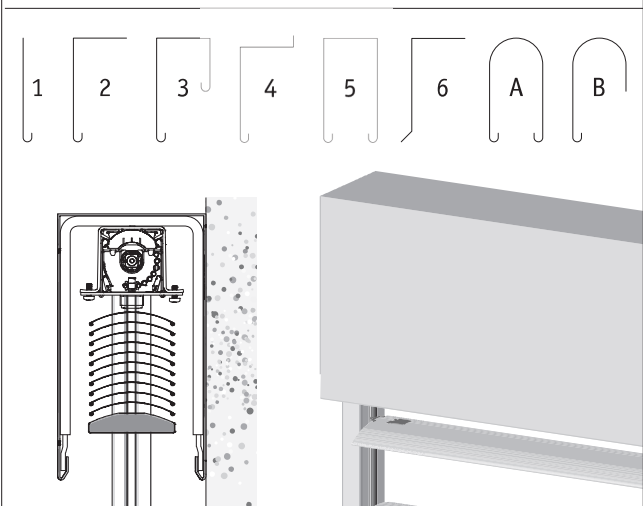

FURTHER OPTIONS (Additional information on page 81)

- Quick raise system for emergency situations (EL80ASKN)
- Dual Light Control
- Slow motion motor for more precise slat tilting
- Beaded slat with inserted black seal to reduce contact noise and light leakage
- Perforated slats
- Additional guiding cable(s)
- For possible motor controls see separately available documentation